

Highlights:

- Ceiling suspension
- Innovative & unique design
- Suspension cable with dual steel core
- Ceiling cable cover
- Rotary switch for 15W, 30W, 60W and 16 Ohm tappings

Product information:

"Pure sound, hanging around."

The ALTI6 is a 2-way pendant loudspeaker featuring a 6.5" driver combination with a coaxially mounted 1" soft dome tweeter and is fitted with a phase plug for excellent off-axis performance.

The 2-way combination with a high-quality polypropylene enclosure and acoustic engineering craftsmanship guarantees premium performance for demanding applications. A continuous power handling of 60 Watt (RMS) and maximum power handling of 120 Watt is achieved. Connections are made through a terminal block connector behind the rear cover, accompanied with a power tap selector switch for the tapping of a 70V/100V line transformer with tappings for 60W, 30W, 15W and a 16 Ohm bypass connection.

Applications:

- Bars, restaurants
- Retail
- Education
- Public facilities
- Corporate spaces
- Sport facilities



Impedance:

16 Ohm

Voltage:

System specifications:

Speaker type	2-way coaxial	
Max. Power	120 W	
RMS Power	60 W	
Line Transformer Tappings	1	60 W / 167 Ω
	2	30 W / 333 Ω
	3	15 W / 667 Ω
Impedance	16 Ω	
Dispersion	Conical	115° (average 500 Hz to 5 kHz @ -6 dB)

Product Features:


Dimensions 230 x 3500 mm (Ø x L) (cable length only)

Variants:


- ALTI6/B - Black version
- ALTI6/W - White version

Acoustical data graphs:


Horizontal Polars:

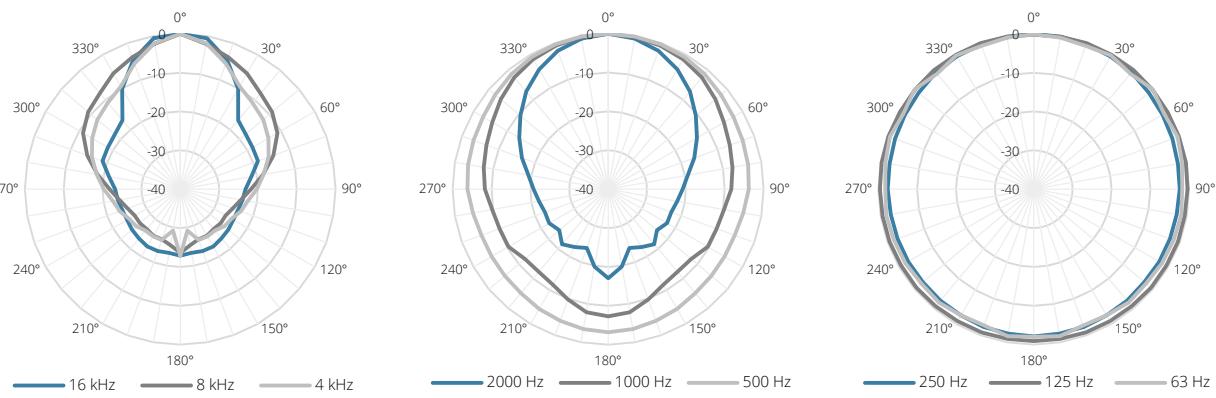


Vertical Polars:

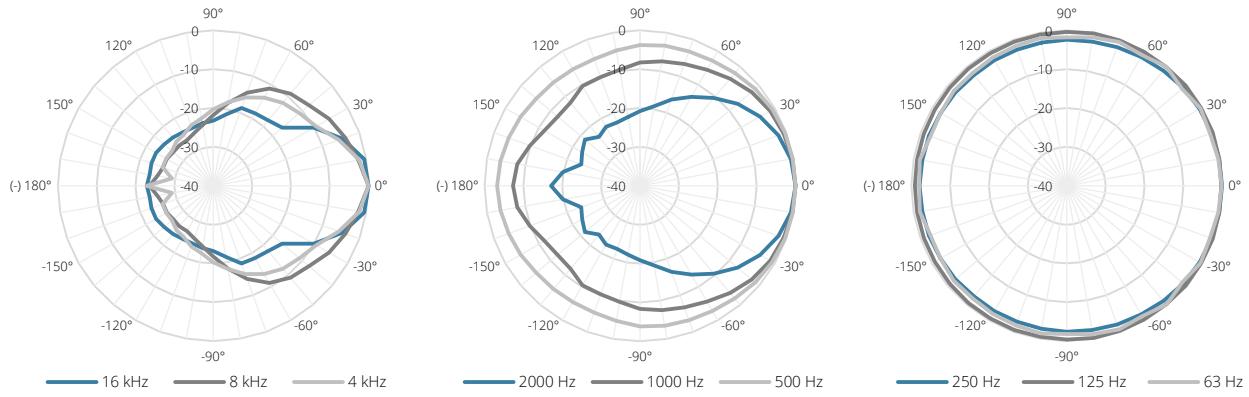

Sensitivity:

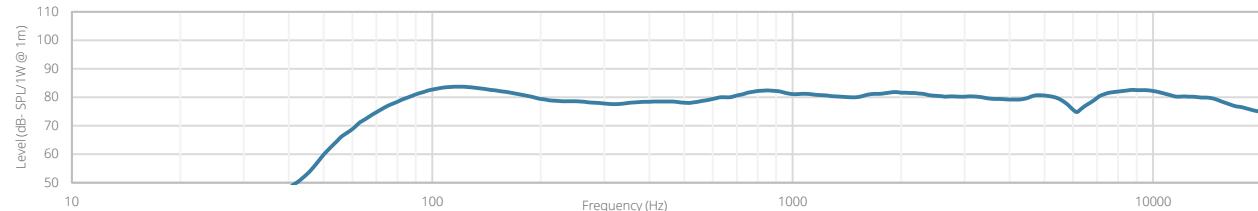

Beamwidth (-3dB):

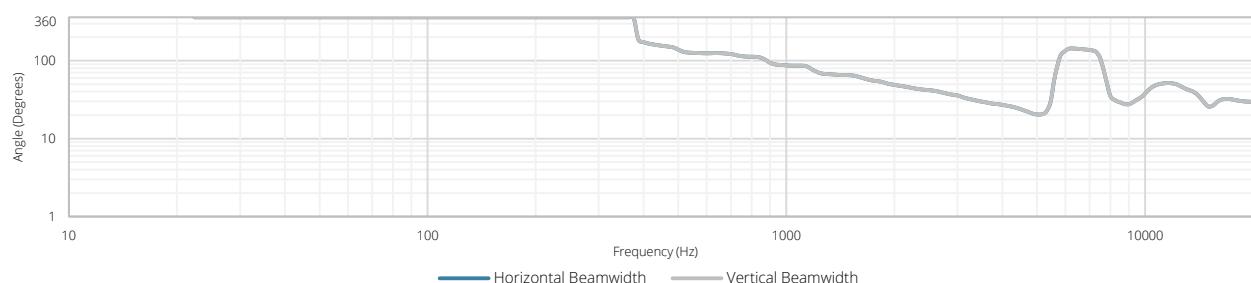

Directivity index:

