

Mosaico Jr

70 W outdoor zoomable LED image projector

ORDER CODE: MOSAICOJR



TECHNICAL SPECIFICATION

LIGHT SOURCE

- Source: 70W White LED
- CCT: 7.000K
- Luminous flux: (14.7°) 2'595 lm - (45°) 2'628lm
- Lux: (14.7°) 1'927 lx - (45°) 294lx @5 m
- Source life expectancy: 30.000 hrs (L70 @25° C / 77° F)

OPTICS

- Zoom: 14.7° - 45° motorised linear zoom
- Lens diameter: 63mm
- Lens type: high-quality glass lens optics
- Focus: motorised

COLOUR SYSTEM

- Colour wheel: 7 colour filters

DYNAMIC EFFECTS

- Rotating gobos: 7 rotating gobos + open, indexing
- Gobo size: gobo Ø 15,8 mm - img Ø 12,7 mm - 1,10 mm
- Auto mode: built-in programs with execution speed adjustment

BODY

- Body: aluminium die-casting
- Body colour: RAL 9006
- Other: inspectable cover window for image replacement and maintenance and record scenes and create chases and shows throughout these scenes

CONTROL

- Protocols: DMX512, RDM, W-DMX, Stand Alone programmer and playback
- DMX channels: 8 / 14channel
- W-DMX: included, wireless solution receiver
- RDM: RDM ready for fixture remote monitor and settings
- Display: black OLED high resolution display
- Firmware upgrade: yes, via USB - DMX interface (UPBOX1) not included
- Master/Slave: for synchronized operation of more units linked in a chain

Mosaico Jr is a compact exterior LED image projector designed for projection of logos, images and textures onto commercial buildings, hotels and city facades. The small size allows for mounting anywhere without any impact on the surrounding environment or architecture. The on board zoom ranges from 14.7° to 45° allowing for an extensive user-flexibility, from projecting crisp and accurate logos to textured projections.

MAIN FEATURES

- IP66 allowing long-lasting installation with minimal maintenance
- Equipped with 14.7° ~ 45° linear zoom system to meet any install indoor or outdoor
- 70 W White LED engine delivering 2'600 lumens
- On board rotating gobo wheel, colour wheel and wireless DMX

ELECTRONICS

- Dimmer: linear 0 ~ 100% electronic dimmer
- Dimmer curves: 4 different dimming curves available
- Strobe / shutter: 1 ~ 21 Hz, electronic
- Battery backup: battery backup for user operation without connecting to the main power
- Operating temperature: -20° C / +45° C (-4° F / +113° F)
- Flicker: flicker free frequency with adjustable PWM

ELECTRICAL

- Power supply: 100-240 V – 50/60 Hz
- Power consumption (at 230 V): (static) 86,5 W - (dynamic) 91,3W
- Power consumption (at 120 V): (static) 85 W - (dynamic) 84,4W
- Output (at 230 V): 23 units on a single power line
- Output (at 120 V): 13 units on a single power line
- Power factor: pF 0,92

PHYSICAL

- Cooling: active, with IP low noise fan
- Suspension and fixing: hanging bracket suitable for safe hanging and positioning
- Adaptors: XLR and Schuko 16A adaptors included
- Signal connection: moulded IP signal IN/OUT connectors
- Power connection: moulded IP power IN/OUT connectors
- IP rating: 66 for outdoor installations
- Dimensions (WxHxD): 247x258x244mm
- Weight: 10kg

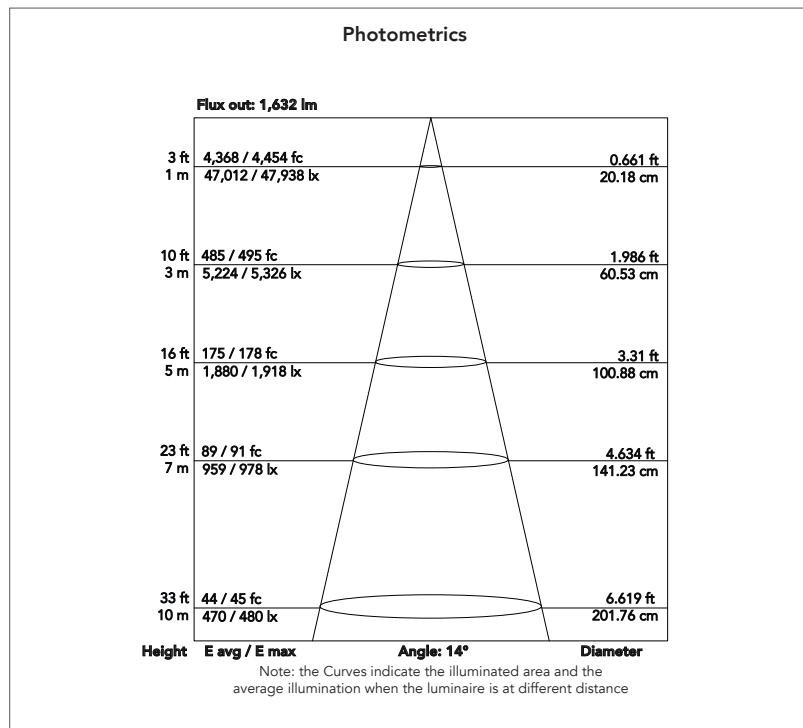
ACCESSORIES & RELATED PRODUCTS

- FCLMOSAIJR: Flightcase for 8 pcs of MOSAICOJR
- MOSUNIBRACKJR: Bracket for MOSAICOJR for wall mounting and suspension on poles
- AWEXAC1: IP67 power extension cable for ARCHWORK projectors, L.03-05-10-20m

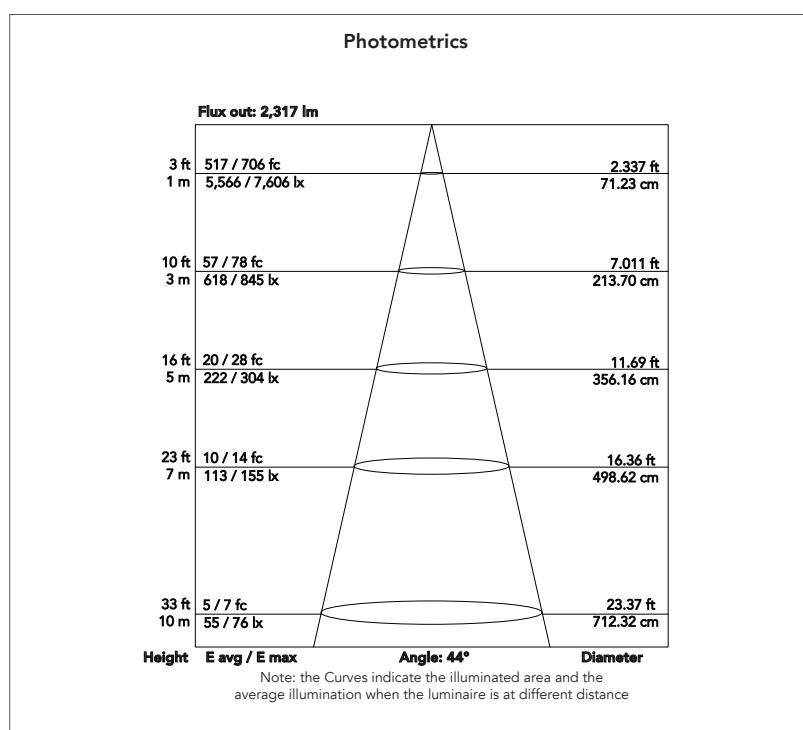

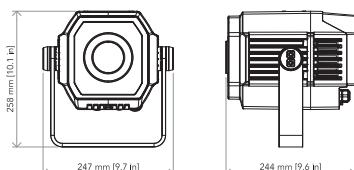
- AWEXDC1: IP67 DMX extension cable for ARCHWORK projectors, L.03-05-10-20 m
- UPBOX: Firmware uploader kit, USB IN, 3-pin XLR DMX OUT, USB OUT

COLOUR PRESET FULL ON

Beam angle 14°


COLOUR PRESET FULL ON

Beam angle 44°


TECHNICAL DRAWINGS

 For more product
info and downloads
visit our website


PROLIGHTS is a trademark of
MUSIC & LIGHTS S.r.l.
musiclights.it

Via A. Olivetti snc
04026 - Minturno (LT) ITALY
Tel: +39 0771 72190

prolights.it
info@prolights.it